

Total No. of Questions : 8]

SEAT No. :

**P252**

[Total No. of Pages : 3

[6003]-329

**T.E. (Civil)**

**DESIGN OF STEEL STRUCTURES  
(2019 Pattern) (Semester - I) (301003)**

*Time : 2½ Hours]*

*[Max. Marks : 70*

*Instructions to the candidates:*

- 1) Answer Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6 and Q.7 or Q.8.
- 2) Neat sketches must be drawn wherever necessary.
- 3) Figures to the right indicate full marks.
- 4) Take  $f_y = 250$  and  $f_c = 410$  grade of steel.
- 5) Take ultimate stress in bolt,  $f_{ub} = 400$  N/mm<sup>2</sup>.
- 6) Assume suitable data, if necessary.
- 7) Use of electronic pocket calculator, IS : 800-2007 and steel table are allowed.
- 8) Use of cell phone is prohibited in the examination hall.

- Q1)** a) State and explain in brief type of column bases. [3]  
b) Check the adequacy of ISHB 450 @ 87.2 kg/m to carry a factored axial load of 850 kN at an eccentricity of 250 mm about major axis. The effective length of column is 3 m. Consider only section strength. [14]

OR

- Q2)** a) Differentiate between slab base and gusseted base. [3]  
b) A column having effective length of 4 m is subjected to factored axial load of 500 kN and factored moment of 75 kNm. Design the column section. Check for section strength only. [14]

- Q3)** a) Explain in brief web buckling and web crippling with suitable sketches. [4]  
b) A simply supported steel joist of 5 m effective span carries a working uniformly distributed load 50 kN/m on entire span and a point load of 70 kN at mid span. The section is laterally supported throughout the span. Design an appropriate section. Apply usual checks for strength along with check for deflection. [14]


OR

- Q4)** a) Classify the section ISLB500@75.0 kg/m and ISA 100 × 75 × 8 mm @ 10.5 kg/m used as a beam. [4]

**P.T.O.**

- b) A simply supported beam carries a uniformly distributed load of magnitude  $W$  kN/m on entire span of 5 m. The compression flange is laterally unsupported throughout the span. Find the intensity of uniformly distributed load the section ISMB 500@ 86.9 kg/m can carry for the beam safely. Both ends of beam are fully restrained against torsion. [14]

- Q5)** Determine panel point dead load, imposed load and wind load for a truss as shown in Figure 1. Assume design wind pressure as  $1170 \text{ N/m}^2$ , use G.I. Sheet and the centre to centre spacing of truss as 3.5 m. Assume self weight of purlin as  $20 \text{ N/m}^2$  on plan area. [17]

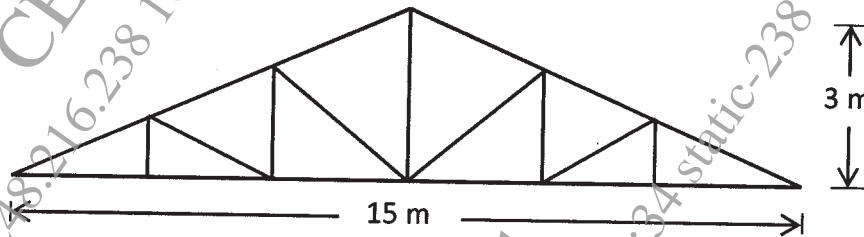

**Fig. 1**

OR

- Q6)** Design a gantry girder supporting an electronically operated crane for following data : [17]

- Capacity of crane = 120 kN.
- Span between crane rails = 20 m.
- Self-weight crane girder = 100 kN.
- Weight of crab, electric motor, hook etc. = 15 kN.
- Minimum hook approach = 1.2 m.
- Wheelbase = 2 m.
- Span of Gantry 5.5 m.
- Weight of rails = 0.3 kN/m.

- Q7)** a) Explain in brief IS provisions for length and spacing of intermittent weld. [4]
- b) Design the cross-section of a simply supported welded plate girder with an effective span of 20 m. The girder is subjected to a working uniformly distributed load of 43 kN/m throughout the span, including self-weight. Assume that the compression flange is laterally supported throughout the span. Apply checks for bending and shear. [14]

OR

- Q8)** a) Explain in brief flange curtailment of plate girder. [4]
- b) A simply supported welded plate girder is designed for the span of 24 m. It is subjected to a shear force of 2300 kN and bending moment of 20700 kNm. A section used for plate girder to carry above load is as given below - [14]
- Flanges - 780 mm wide and 50 mm thick.  
Web - 16 mm thick and 2600 mm deep.  
Design intermittent welded connection between flange and web. Also design end bearing stiffener. Assume stiff bearing length as 300 mm near support.

